

MS-IR FAMILY

MULTISPECTRAL INFRARED CAMERAS.

The MS-IR infrared camera allows the scene to be split into eight different spectral bands rather than only one broadband image, thereby allowing target spectral signature analysis. The filter wheel is a fast rotating mechanism designed to maximize the cameras' frame rate. Rotating speed is user-adjustable up to 100 Hz per filter, thus allowing a frame rate up to 800 fps in a synchronised mode.



The motorized 8-filter wheel.

KEY BENEFITS.

Multispectral Capabilities : Performs 8-channel multispectral analysis using a high-speed filter wheel. In fast rotating mode, the image acquisition is synchronised so that one image per filter is acquired. The filter wheel can also be used in static mode.

High Dynamic Range : Unique Telops proprietary non-linearity correction and exposure time independent calibration algorithms ensure observation of scene targets with the highest possible contrast and accuracy.




In addition, optional fast automated attenuation filter mechanisms can be added to measure scenes with extreme temperature variations.

Advanced Calibration : Real-time processing of infrared images including NUC, radiometric temperature, in-band radiance, automated exposure control (AEC) and enhanced high dynamic range imaging (EHDR). With these unique features, scientists benefit from ease of use and operation flexibility while getting accurate measurements over the entire camera's operation range.

Accurate Measurement : Radiometric temperature accuracy of $\pm 1^\circ\text{C}$ or $\pm 1\%$ over the entire range.

High Sensitivity : Temperature differences as small as 20 mK are detectable.

EXAMPLE OF A TYPICAL USE.

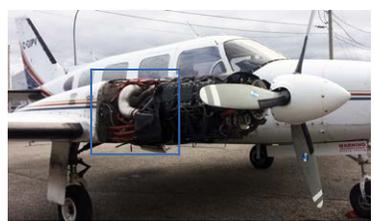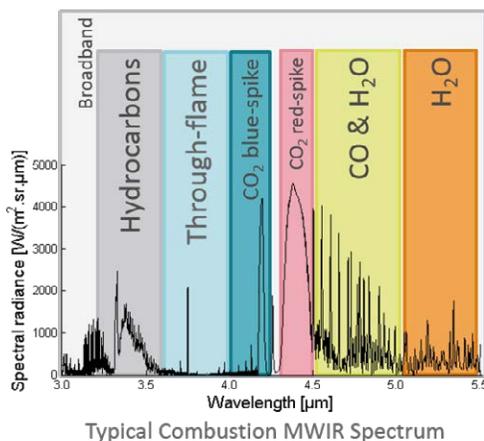

The spectral emissivity of typical combustion gases is not constant as a function of wavelength as illustrated in the MWIR spectra of typical combustion products.

These spectral features can be seen in real time with time-resolved multispectral imaging.

MIDWAVE SERIES

DETECTOR SPECIFICATIONS	MS M2k	MS M100k	MS M350
Detector type	InSb	MCT	InSb
Spectral range	3 μm to 5.4 μm	3 μm to 4.9 μm	3 μm to 5 μm
Spatial resolution	320 \times 256 pixels	640 \times 512 pixels	640 \times 512 pixels
Detector pitch	30 μm	16 μm	15 μm
Aperture size	F/2.5	F/4	F/3
TYPICAL PERFORMANCES			
Frame rate	2 000 Hz	115 Hz	350 Hz
Maximum frame rate (static filter wheel mode)	90 000 Hz @ 64 \times 2	120 000 Hz @ 64 \times 2	4 900 Hz @ 132 \times 2
Typical NETD	25 mK	17 mK	20 mK
ELECTRONIC SPECIFICATIONS			
Exposure time	1 μs to full frame rate	0.2 μs to full frame rate	0.5 μs to full frame rate
CAMERA CONSTRUCTION			
Lens mount	Bayonet interface	Bayonet interface	Bayonet interface

VERY LONG WAVE SERIES

DETECTOR SPECIFICATIONS	MS V350	MS V300
Detector type	SLS	MCT
Spectral range	7.5 μm to 12 μm (other ranges available)	7.7 μm to 11.8 μm
Spatial resolution	320 \times 256 pixels	320 \times 256 pixels
Detector pitch	30 μm	30 μm
Aperture size	F/2	F/2
TYPICAL PERFORMANCES		
Frame rate	344 Hz	300 Hz
Maximum frame rate (static filter wheel mode)	12 000 Hz @ 128 \times 8	79 000 Hz @ 64 \times 2
Typical NETD	25 mK	25 mK
ELECTRONIC SPECIFICATIONS		
Exposure time	5 μs to full frame rate	0.5 μs to full frame rate
CAMERA CONSTRUCTION		
Lens mount	Threaded interface	Threaded interface

hd SERIES

DETECTOR SPECIFICATIONS	MS M200 <i>hd</i>	MS M100 <i>hd</i>
Detector type	InSb	MCT
Spectral range	3 μm to 5 μm (1.5 μm - 5 μm available)	3.7 μm to 4.8 μm (other ranges available)
Spatial resolution	1280 \times 1024 pixels	1280 \times 1024 pixels
Detector pitch	10 μm	15 μm
Aperture size	F/3	F/3
TYPICAL PERFORMANCES		
Frame rate	170	118
Maximum frame rate (static filter wheel mode)	4 700 Hz @ 1280 \times 2	26 700 Hz @ 256 \times 2
Typical NETD	25 mK	25 mK
ELECTRONIC SPECIFICATIONS		
Exposure time	1 μs to full frame rate	16 μs to full frame rate
CAMERA CONSTRUCTION		
Lens mount	Bayonet interface	Bayonet interface

**COMMON SPECS**

Sensor cooling	Rotary-stirling closed cycle
Scene temperature range	Up to 1500 °C Other ranges available.
Dynamic range	16 bits
Measurement accuracy	1 K or 1 % (°C) from -15 °C to 150 °C
Multispectral filter wheel	8 \times 1" filters; static or fast-rotating mode
Size w/o lens	13.8" \times 8.5" \times 9.3" 352 mm \times 216 mm \times 236 mm
Weight w/o lens	< 13 kg

FOR MORE INFORMATION

TELOPS HEADQUARTERS
 contact@telops.com
 Tel.: +1 (418) 864-7808

TELOPS USA
 vince.morton@telops.com
 Tel.: +1 (831) 419-7507

TELOPS EUROPE
 eric.guyot@telops.com
 Tel.: +33 1 70 27 71 34

TELOPS CHINA
 luoyi@telops.com
 Tel.: +86 139 1065 8965



Telops is a leading supplier of high-performance scientific infrared cameras for the defence, academic, industrial, and environmental research industries. Telops also offers R&D services for optical systems technology development.

Since its beginning in 2000, Telops has distinguished itself with the quality of its technical personnel and its innovative approach to many technological challenges in the optics field. Today, the expertise of its scientists, engineers and technologists and the performances of its infrared cameras and hyperspectral imagers are internationally recognized.



Quebec City's Château Frontenac in infrared



INFRARED CAMERAS' KEY FEATURES

All our infrared cameras offer advanced features to address the most demanding research applications. They include :

- Blackbody-free permanent calibration
- Calibration up to 2500 °C (optional)
- High-speed internal memory buffer: up to 16 GB
- Gig-E
- Camera Link
- Trigger In, Trigger Out
- SDI, GPS, IrigB, RS232 and thermistor ports
- Lock-In (optional)
- Automatic exposure control (AEC)
- Enhanced high-dynamic-range imaging (EHDMI)

INFRARED CAMERAS' LENS OPTIONS

Telops offers a variety of lens options depending on your camera configuration using either a flanged, threaded, or bayonet mount interface.

Customized optics are available, as well as many accessories such as telescopes and microscopes.