



# Fiber Optic Receptacles


FC / SC / ST Receptacle Packages

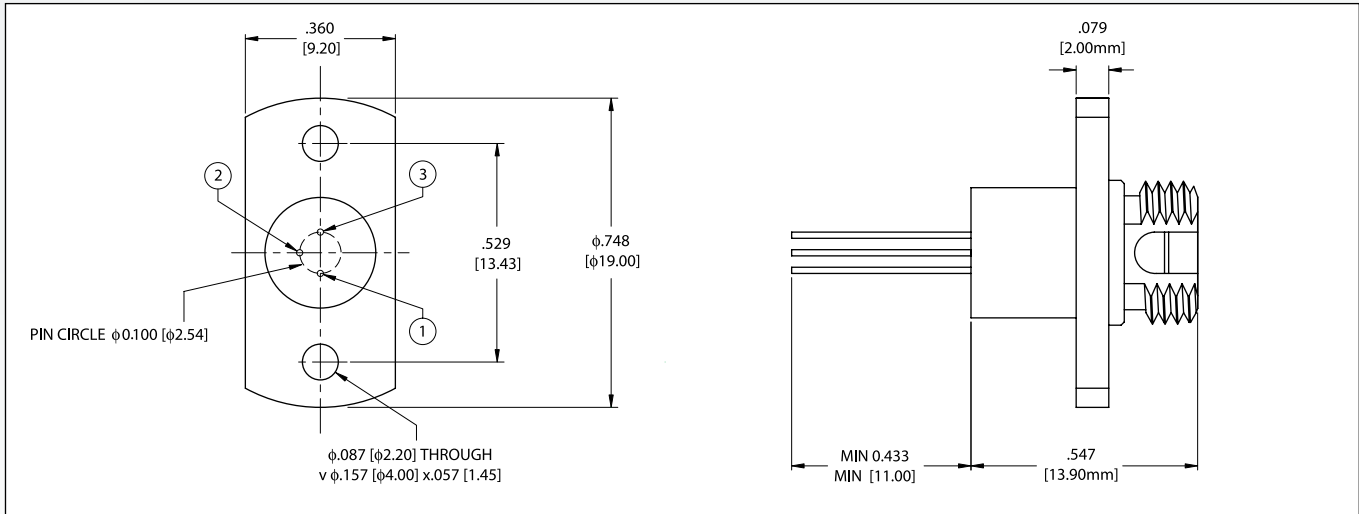

FC Receptacle Package

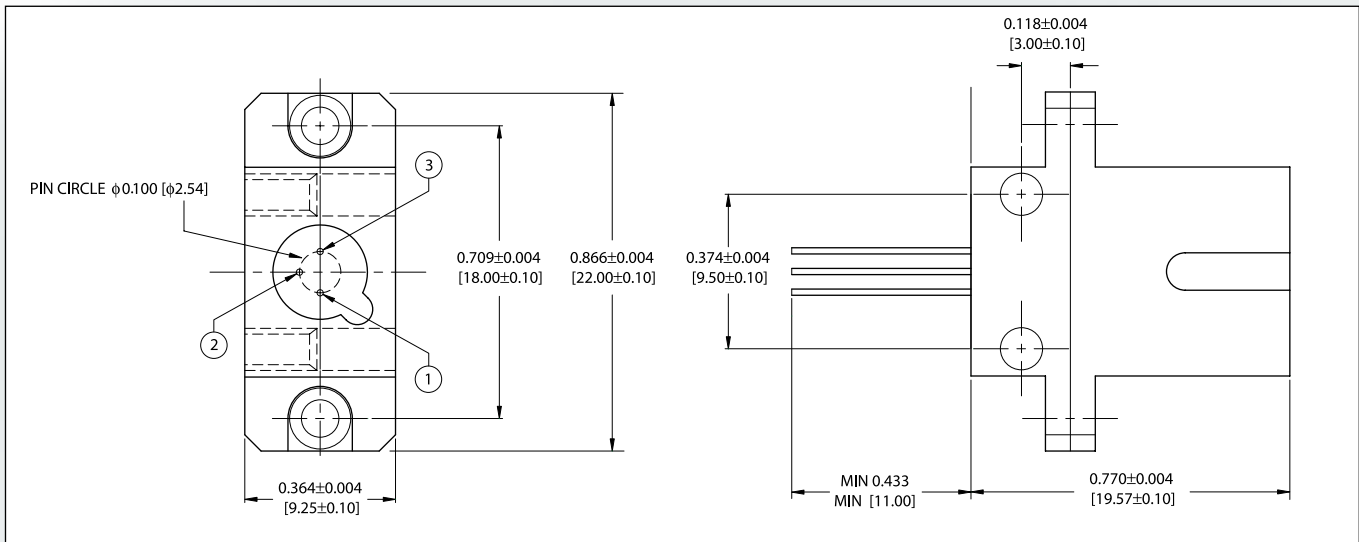

SC Receptacle Package

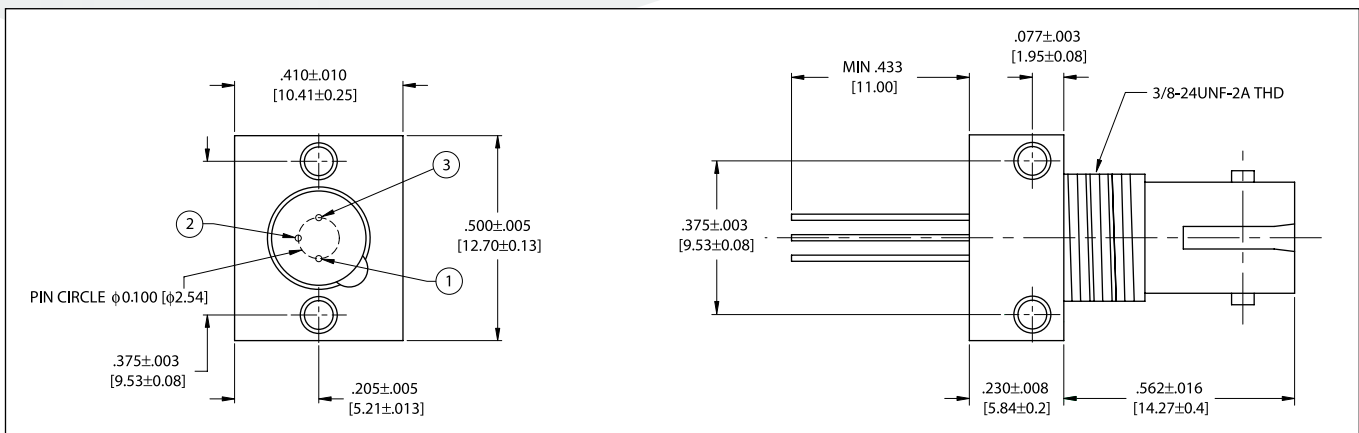

ST Receptacle Package

Please note that all receptacle-associated photo-detectors carry an additional 0.45dB insertion loss-that is 10% loss to the incident signal power.

PIN#	FCI-HR-XXX	FCI-125G-XXXHR FCI-InGaAs-XXX
1	ANODE	CATHODE
2	CATHODE	CASE
3	CASE	ANODE